

- ✓ Architectural machined aluminium bezel
- ✓ Integrated black baffle to reduce glare
- ✓ Incredibly low maintenance
- ✓ Designed & produced in the UK
- ✓ Mains dimmable as standard
- ✓ DALI, 1-10V & Casambi dimming
- ✓ Emergency options available
- ✓ <3 SDCM colour consistency
- ✓ Wide beam angle



upto  
**79**  
Lm/cW

**Fire rated**  
30 & 60min fire rated

**IP65**  
Bathrooms & wet areas

**Fast install**  
Plug+Play push connector

**Excellent CRI**  
Ra80+ & Ra90+ options

**Mains dimming**  
as standard

**Part L1&L2**  
& ECA compliant\*

**Zero DB**  
Acoustic rated\*

**50,000hr**  
Expected lifetime

**5 year**  
Ext. warranty\*

\*For ECA compliance seek qualified accounting advice to check if your specific product / project is eligible. Driver not acoustically tested. Adjustable fittings: IP65 light engine only. All lumen, power & efficacy figures are +/- 10% @25°C ambient temp. Must register warranty online. Information correct at the time of writing and can change at any given time without notice. For the most up-to-date information, visit neoled.co.uk

## Order Information

+3 Maintained emergency pack, +S Self Test emergency pack, +D DALI emergency pack  
For Ra90+ option, swap '8' for '9' Eg 827 = 927

	<b>Mains Dimmable</b>	<b>1-10V Dimming</b>	<b>DALI Dimming</b>	<b>Casambi Dimming</b> <span style="background-color: #007bff; color: white; padding: 2px;">NEW</span>
	<b>Ultra Warm 2700K</b> 394Lm, 68Lm/cW, Ra80+	NEO.DL6.827.M	NEO.DL6.827.A	NEO.DL6.827.D

<b>Warm 3000K</b> 405Lm, 70Lm/cW, Ra80+	NEO.DL6.830.M	NEO.DL6.830.A	NEO.DL6.830.D	NEO.DL6.830.C
--------------------------------------------	---------------	---------------	---------------	---------------

<b>Neutral 4000K</b> 440Lm, 76Lm/cW, Ra80+	NEO.DL6.840.M	NEO.DL6.840.A	NEO.DL6.840.D	NEO.DL6.840.C
-----------------------------------------------	---------------	---------------	---------------	---------------

	<b>Mains Dimmable</b>	<b>1-10V Dimming</b>	<b>DALI Dimming</b>	<b>Casambi Dimming</b> <span style="background-color: #007bff; color: white; padding: 2px;">NEW</span>
	<b>Ultra Warm 2700K</b> 554Lm, 71Lm/cW, Ra80+	NEO.DL8.827.M	NEO.DL8.827.A	NEO.DL8.827.D

<b>Warm 3000K</b> 570Lm, 73Lm/cW, Ra80+	NEO.DL8.830.M	NEO.DL8.830.A	NEO.DL8.830.D	NEO.DL8.830.C
--------------------------------------------	---------------	---------------	---------------	---------------

<b>Neutral 4000K</b> 619Lm, 79Lm/cW, Ra80+	NEO.DL8.840.M	NEO.DL8.840.A	NEO.DL8.840.D	NEO.DL8.840.C
-----------------------------------------------	---------------	---------------	---------------	---------------

## Accessories




**NEO.HA1**  
1 Part hole adapter (90mm-105mm)

\*Fitting not included

**NEO.HA2**  
2 Part hole adapter (105mm-170mm)



**NEO.IS1**  
Thermal insulation spacer

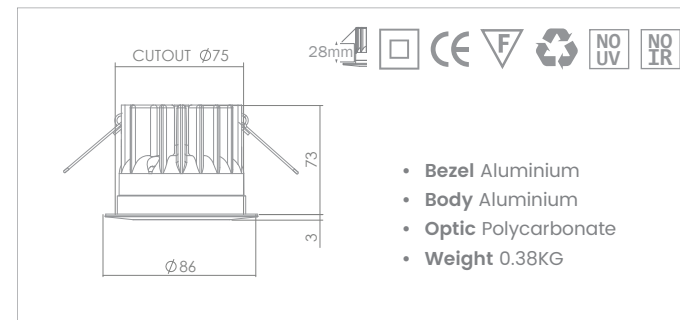

Choice of finish



Contact Sales for custom bezel and baffle paint finishes